

ATHOS

HG2253


Front axle

- Especially for use on motorways and well-constructed roads
- Optimised 5-rib tread for good handling
- Outstanding damage resistance and minimal stone trapping
- Increased crown width for higher mileage
- Optimised rolling characteristics ensures stable road grip
- Excellent wet grip due to siping and block geometry
- Very high load-bearing capacity
- High cost effectiveness
- Regroovable and suitable for cold and hot retreading

TECHNICAL DATA

SIZE	LOAD/SPEED	DEPTH	WEIGHT
385/55 R 22.5	160K (158 L)	13	66,0 kg

EU-LABEL DATA

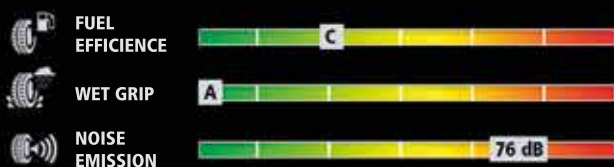

A private brand of the

HAMMERLING
G R O U P